


Crimp Tabs

Flachstecker Crimppausführung

Attaches Pince

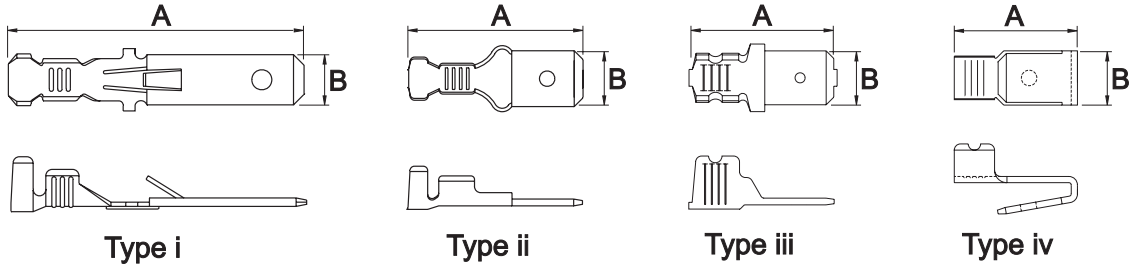

Wire Range	Tab Thickness	Material	A	B	C	D	E	Reel Size	Pack Size	Part Number	Approvals
Nennquerschnitt	Steckerdicke	Werkstoff	A	B	C	D	E	Spulengröße	Packungsgröße	Best Nr	Zulassungen
Section câble	Épaisseur languette	Matière						Bobines à	Unité d'emballage	Code Nr	Homologations

Type I - with Tang and Dimple DIN 46343

0.25 - 0.5	0.8	CuZn	22.0	2.8				10K	30K	28CT08-17AB	
0.25 - 0.5	0.8	CuZn gal Sn	22.0	2.8				10K	30K	28CT08-17AC	
0.25 - 0.5	0.8	CuSn	22.0	2.8				10K	30K	28CT08-17AA	
0.25 - 0.5	0.8	CuSn gal Sn	22.0	2.8				10K	30K	28CT08-17AG	

Type I - with Tang but no Dimple DIN 46343

0.25 - 0.5	0.8	CuZn	22.0	2.8				10K	30K	28CT08-14AB	
0.25 - 0.5	0.8	CuZn gal Sn	22.0	2.8				10K	30K	28CT08-14AC	
0.25 - 0.5	0.8	CuSn	22.0	2.8				10K	30K	28CT08-14AA	
0.25 - 0.5	0.8	CuSn gal Sn	22.0	2.8				10K	30K	28CT08-14AG	

Type II

0.5-1.0	0.8	CuZn	12.6	2.8	0.8	-	14.5	7K	21K	28CT08-10DB-2	
0.5-1.0	0.8	St gal Ni	12.6	2.8	0.8	-	14.5	7K	21K	28CT08-10DE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



4.0 - 1.5

FM 09860