


Crimp Tabs

Flachstecker Crimppausführung

Attaches Pince

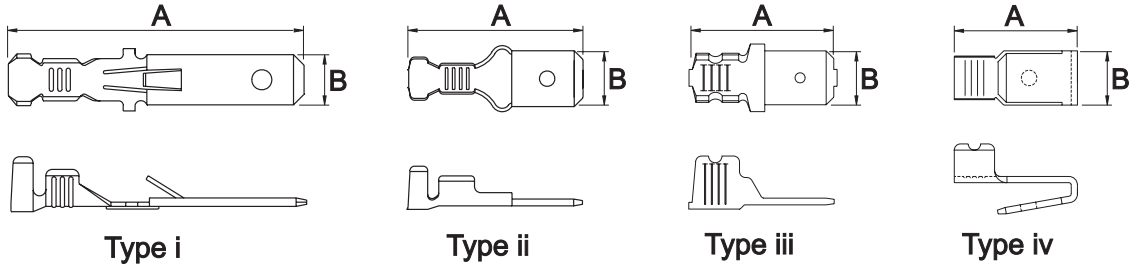

Wire Range	Tab Thickness	Material	A	B	C	D	E	Reel Size	Pack Size	Part Number	Approvals
Nennquerschnitt	Steckerdicke	Werkstoff	A	B	C	D	E	Spulengröße	Packungsgröße	Best Nr	Zulassungen
Section câble	Épaisseur languette	Matière						Bobines à	Unité d'emballage	Code Nr	Homologations

Type I 6.3 with Tang

0.5-1.0	0.8	Cu Zn	28.0	6.3	-	-	-	5K		63CT08-10DB-2	
0.5-1.0	0.8	Cu Zn gal Sn	28.0	6.3	-	-	-	5K		63CT08-10DC-2	
0.7-2.1	0.8	Cu Zn	28.0	6.3	-	-	-	5K		63CT08-10GB	
0.7-2.1	0.8	Cu Zn gal Sn	28.0	6.3	-	-	-	5K		63CT08-10GC	
2x0.5-1.0	0.8	Cu Zn	28.0	6.3	-	-	-	5K		63CT08-13DB	
2x0.5-1.0	0.8	Cu Zn gal Sn	28.0	6.3	-	-	-	5K		63CT08-13DC	

Type II 6.3

0.5-1.0	0.8	Cu Zn	19.8	6.3	-	-	-	6K		63CT08-10DB	
0.5-1.0	0.8	Cu Zn gal Sn	19.8	6.3	-	-	-	6K		63CT08-10DC	

Type III 6.3 for Element Wires

0.45-0.71DIA	0.8	Cu Ni Zn	54.5	6.3	-	-	-	4K		63CT08-10BD	
2.4-3.2 DIA	0.8	Cu Ni Zn	16.8	6.3	-	-	-	6K		63CT08-10LD	
2.4-3.2 DIA	0.8	ST gal Ni	21.2	6.3	-	-	-	10K		63CT08-10LE	

Type IV 6.3 Piggy Back

2.4-3.2 DIA	0.8	Cu Ni Zn	16.1	6.3	-	-	-	1.5K		63CT08-10LD-2	
-------------	-----	----------	------	-----	---	---	---	------	--	---------------	--

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



4.0 - 1.7

FM 09860