




# P.C.B Mounting Tabs

Flachstecker Für  
Gedruckte Schaltungen


Attaches Support P.C.B

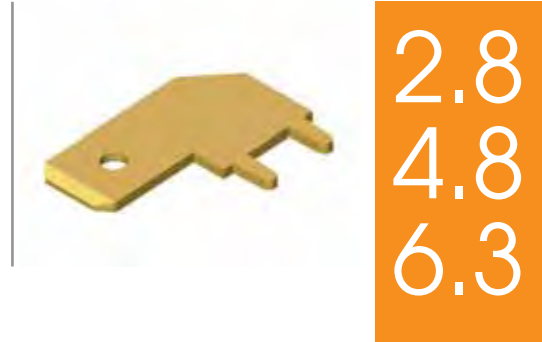

**SINGLE LEG**

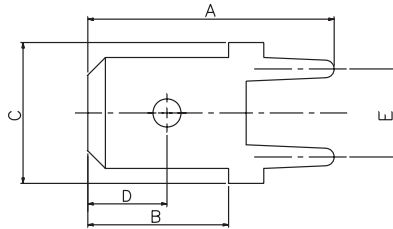

**DOUBLE LEG**



**DOUBLE LEG - 90° ANGLE**

| Tab Size                  | Tab Thickness       | Material  | A | B | C | D | E | Reel Size   | Pack Size         | Part Number | Approvals     |
|---------------------------|---------------------|-----------|---|---|---|---|---|-------------|-------------------|-------------|---------------|
| Flachstecker<br>Abmessung | Steckerdicke        | Werkstoff | A | B | C | D | E | Spulengröße | Packungsgröße     | Best Nr     | Zulassungen   |
| Largeur Languette         | Epaisseur languette | Matière   |   |   |   |   |   | Bobines à   | Unité d'emballage | Code Nr     | Homologations |

### Straight Single Leg

|     |     |             |      |     |     |   |   |  |     |              |  |
|-----|-----|-------------|------|-----|-----|---|---|--|-----|--------------|--|
| 2.8 | 0.5 | CuZn gal Sn | 10.5 | 7.0 | 2.8 | - | - |  | 10K | 28-B05S-A0CA |  |
|-----|-----|-------------|------|-----|-----|---|---|--|-----|--------------|--|

### Double Leg Straight

|     |     |             |      |     |     |      |     |  |    |              |  |
|-----|-----|-------------|------|-----|-----|------|-----|--|----|--------------|--|
| 4.8 | 0.8 | CuZn gal Sn | 12.8 | 7.0 | 6.5 | 3.05 | 5.2 |  | 1K | 48-B08D-A0CF |  |
| 6.3 | 0.8 | CuZn gal Sn | 14.0 | 8.0 | 8.0 | 4.5  | 5.0 |  | 1K | 63-B08D-A0CA |  |

### Double Leg- 90° Angle

|     |     |             |      |     |      |      |     |  |     |              |  |
|-----|-----|-------------|------|-----|------|------|-----|--|-----|--------------|--|
| 2.8 | 0.8 | CuZn gal Sn | 7.3  | 8.0 | 8.0  | 8.0  | 8.0 |  | 10K | 28-B08D-A0CK |  |
| 2.8 | 0.5 | CuZn gal Sn | 13.5 | -   | 8.0  | -    | 5.0 |  | 10K | 28-B05D-A0CK |  |
| 4.8 | 0.8 | CuZn gal Sn | 13.5 | -   | 10.0 | 3.25 | 5.0 |  | 1K  | 48-B08D-A0CK |  |
| 6.3 | 0.8 | CuZn gal Sn | 16.2 | -   | 9.0  | 4.0  | 5.0 |  | 1K  | 63-B08D-A0CK |  |

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



4.0 - 1.8