




Eye Terminals - Anti-vibration with Insulation Support

Ringkabelschuhe Mit Innenverzahnung

Connecteurs Ronds Anti-vibration Avec Support Isolant



ET
3-5mm

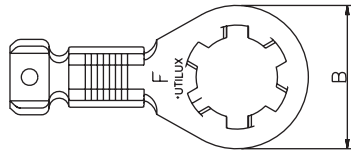

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgrösse	Mat. dicke	Werkstoff					Spulengrösse	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

0.7-2.1	4.0	3.4	0.45	CuZn	19.8	9.5	21.8	-	6K	18K	ET-213GB	
0.7-2.1	4.0	3.4	0.45	CuZn gal Sn	19.8	9.5	21.8	-	6K	18K	ET-213GC	
0.7-2.1	4.0	3.4	0.45	CuNi Zn	19.8	9.5	21.8	-	6K	18K	ET-213GD	
0.7-2.1	4.0	3.4	0.45	St gal Ni	19.8	9.5	21.8	-	6K	18K	ET-213GE	
0.7-2.1	4.0	4.4	0.45	CuZn	19.8	9.5	21.8	-	6K	18K	ET-214GB	
0.7-2.1	4.0	4.4	0.45	CuZn gal Sn	19.8	9.5	21.8	-	6K	18K	ET-214GC	
0.7-2.1	4.0	4.4	0.45	CuNi Zn	19.8	9.5	21.8	-	6K	18K	ET-214GD	
0.7-2.1	4.0	4.4	0.45	St gal Ni	19.8	9.5	21.8	-	6K	18K	ET-214GE	
0.7-2.1	4.0	5.4	0.45	CuZn	19.8	9.5	21.8	-	6K	18K	ET-215GB	
0.7-2.1	4.0	5.4	0.45	CuZn gal Sn	19.8	9.5	21.8	-	6K	18K	ET-215GC	
0.7-2.1	4.0	5.4	0.45	CuNi Zn	19.8	9.5	21.8	-	6K	18K	ET-215GD	
0.7-2.1	4.0	5.4	0.45	St gal Ni	19.8	9.5	21.8	-	6K	18K	ET-215GE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



5.0 - 1.7