




Eye Terminals with Insulation Support, Din

Ringkabelschuhe Mit Isolationshalterung, Din

Connecteurs Ronds Avec Support Isolant, Din



ET
3-5mm

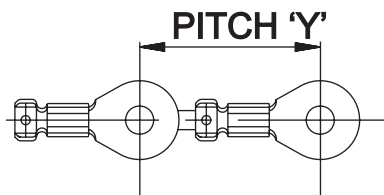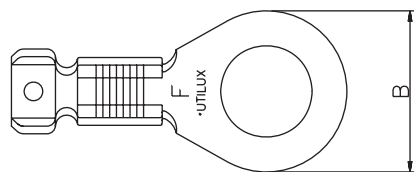

DIMENSIONALLY CONFORMS TO DIN 46 225

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgrösse	Mat. dicke	Werkstoff	A	B	X	Y	Spulengrösse	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

Plain Hole to Suit 3mm Stud

0.5-1.0	2.8	3.3	0.6	CuZn	22.2	7.9	-	24.2	6K	18K	ET-113DB	
0.5-1.0	2.8	3.3	0.6	CuZn gal Sn	22.2	7.9	-	24.2	6K	18K	ET-113DC	
0.5-1.0	2.8	3.3	0.6	St gal Ni	22.2	7.9	-	24.2	6K	18K	ET-113DE	

Plain Hole to Suit 4mm Stud

0.5-1.0	2.8	4.4	0.6	CuZn	22.2	7.9	-	24.2	6K	18K	ET-114DB	
0.5-1.0	2.8	4.4	0.6	CuZn gal Sn	22.2	7.9	-	24.2	6K	18K	ET-114DC	
0.5-1.0	2.8	4.4	0.6	St gal Ni	22.2	7.9	-	24.2	6K	18K	ET-114DE	

Eye Terminal with Insulation Support DIN 46 2

0.5 - 1.0	-	5.3	0.6	CuZn	22.3	9.5	-	-	6K	18K	ET-115DB	
0.5 - 1.0	-	5.3	0.6	CuZn gal Sn	22.3	9.5	-	-	6K	18K	ET-115DC	
0.5 - 1.0	-	5.3	0.6	St gal Ni	22.3	9.5	-	-	6K	18K	ET-115DE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



5.0 - 2.0




Eye Terminals with Insulation Support, Din

Ringkabelschuhe Mit Isolationshalterung, Din

Connecteurs Ronds Avec Support Isolant, Din



ET
3-6mm

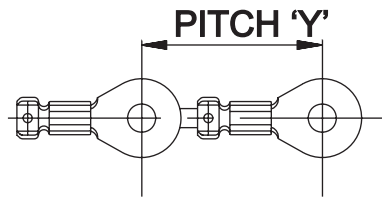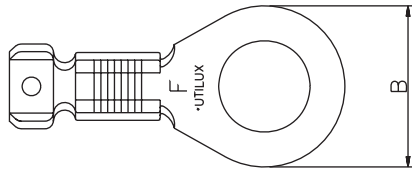

DIMENSIONALLY CONFORMS TO DIN 46 225

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgrösse	Mat. dicke	Werkstoff	A	B	X	Y	Spulengrösse	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

Plain Hole to Suit 3mm Stud

1.0-2.5	3.9	3.3	0.6	CuZn	22.2	7.9	-	24.2	5K	15K	ET-113HB	
1.0-2.5	3.9	3.3	0.6	CuZn gal Sn	22.2	7.9	-	24.2	5K	15K	ET-113HC	
1.0-2.5	3.9	3.3	0.6	St gal Ni	22.2	7.9	-	24.2	5K	15K	ET-113HE	

Plain Hole to Suit 4mm Stud

1.0-2.5	3.9	4.4	0.6	CuZn	22.2	7.9	-	24.2	5K	15K	ET-114HB	
1.0-2.5	3.9	4.4	0.6	CuZn gal Sn	22.2	7.9	-	24.2	5K	15K	ET-114HC	
1.0-2.5	3.9	4.4	0.6	St gal Ni	22.2	7.9	-	24.2	5K	15K	ET-114HE	

Plain Hole to Suit 5mm Stud

1.0-2.5	3.9	5.4	0.6	CuZn	22.2	9.4	-	24.2	5K	15K	ET-115HB	
1.0-2.5	3.9	5.4	0.6	CuZn gal Sn	22.2	9.4	-	24.2	5K	15K	ET-115HC	
1.0-2.5	3.9	5.4	0.6	St gal Ni	22.2	9.4	-	24.2	5K	15K	ET-115HE	

Eye Terminal with Insulation Support DIN 46 225

0.5 - 1.0	-	6.5	0.6	CuZn	22.3	9.5	-	-	6K	18K	ET-116HB	
0.5 - 1.0	-	6.5	0.6	CuZn gal Sn	22.3	9.5	-	-	6K	18K	ET-116HC	
0.5 - 1.0	-	6.5	0.6	St gal Ni	22.3	9.5	-	-	6K	18K	ET-116HE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



5.0 - 2.1

FM 09860




Eye Terminals with Insulation Support

Ringkabelschuhe Mit Isolationshalterung

Connecteurs Ronds Avec Support Isolant



ET
4-5mm

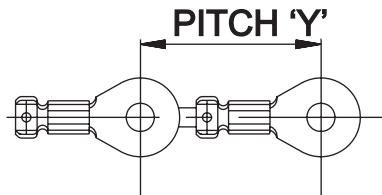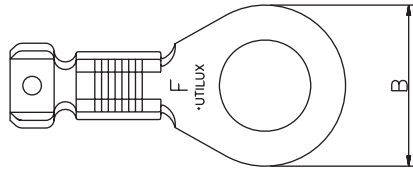

**DIMENSIONALLY
CONFORMS TO
DIN 46 225**

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgrösse	Mat. dicke	Werkstoff	A	B	X	Y	Spulengrösse	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

Eye Terminal with Insulation Support DIN 46 2

4.0 - 6.0	-	4.3	0.8	CuSn	26.2	9.5	-	27.5	2K	6K	ET-114TA	
4.0 - 6.0	-	4.3	0.8	CuZn	26.2	9.5	-	27.5	2K	6K	ET-114TB	
4.0 - 6.0	-	4.3	0.8	CuZn gal Sn	26.2	9.5	-	27.5	2K	6K	ET-114TC	
4.0 - 6.0	-	4.3	0.8	CuNi Zn	26.2	9.5	-	27.5	2K	6K	ET-114TD	
4.0 - 6.0	-	4.3	0.8	St gal Ni	26.2	9.5	-	27.5	2K	6K	ET-114TE	
4.0 - 6.0	-	4.3	0.8	St gal Sn	26.2	9.5	-	27.5	2K	6K	ET-114TJ	
4.0 - 6.0	-	5.3	0.8	CuSn	26.2	9.5	-	27.5	2K	6K	ET-115TA	
4.0 - 6.0	-	5.3	0.8	CuZn	26.2	9.5	-	27.5	2K	6K	ET-115TB	
4.0 - 6.0	-	5.3	0.8	CuZn gal Sn	26.2	9.5	-	27.5	2K	6K	ET-115TC	
4.0 - 6.0	-	5.3	0.8	CuNi Zn	26.2	9.5	-	27.5	2K	6K	ET-115TD	
4.0 - 6.0	-	5.3	0.8	St gal Ni	26.2	9.5	-	27.5	2K	6K	ET-115TE	
4.0 - 6.0	-	5.3	0.8	St gal Sn	26.2	9.5	-	27.5	2K	6K	ET-115TJ	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



5.0 - 2.2

FM 09860




Eye Terminals - Anti-vibration with Insulation Support

Ringkabelschuhe Mit Innenverzahnung

Connecteurs Ronds Anti-vibration Avec Support Isolant



ET
3-4mm



DIMENSIONALLY CONFORMS TO DIN 46 225

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgröße	Mat. dicke	Werkstoff	A	B	X	Y	Spulengröße	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Épaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

Hole to Suit 3mm Stud

0.5-1.0	2.8	3.3	0.6	CuZn	22.2	7.9	-	24.2	6K	18K	ET-213DB	
0.5-1.0	2.8	3.3	0.6	CuZn gal Sn	22.2	7.9	-	24.2	6K	18K	ET-213DC	
0.5-1.0	2.8	3.3	0.6	St gal NI	22.2	7.9	-	24.2	6K	18K	ET-213DE	

Hole to Suit 4mm Stud

0.5-1.0	2.8	4.4	0.6	CuZn	22.2	7.9	-	24.2	6K	18K	ET-214DB	
0.5-1.0	2.8	4.4	0.6	CuZn gal Sn	22.2	7.9	-	24.2	6K	18K	ET-214DC	
0.5-1.0	2.8	4.4	0.6	St gal NI	22.2	7.9	-	24.2	6K	18K	ET-214DE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



5.0 - 2.3

FM 09860




Eye Terminals - Anti-vibration with Insulation Support

Ringkabelschuhe Mit Innenverzahnung Und Isolationshalterung

Connecteurs Ronds Anti-vibration Avec Support Isolant



ET
3-5mm



DIMENSIONALLY CONFORMS TO DIN 46 225

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgrösse	Mat. dicke	Werkstoff	A	B	X	Y	Spulengrösse	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

Hole to Suit 3mm Stud

1.0-2.5	3.9	3.3	0.6	CuZn	22.2	7.9	-	24.2	5K	15K	ET-213HB	
1.0-2.5	3.9	3.3	0.6	CuZn gal Sn	22.2	7.9	-	24.2	5K	15K	ET-213HC	
1.0-2.5	3.9	3.3	0.6	St gal NI	22.2	7.9	-	24.2	5K	15K	ET-213HE	

Hole to Suit 4mm Stud

1.0-2.5	3.9	4.4	0.6	CuZn	22.2	7.9	-	24.2	5K	15K	ET-214HB	
1.0-2.5	3.9	4.4	0.6	CuZn gal Sn	22.2	7.9	-	24.2	5K	15K	ET-214HC	
1.0-2.5	3.9	4.4	0.6	St gal NI	22.2	7.9	-	24.2	5K	15K	ET-214HE	

Hole to Suit 5mm Stud

1.0-2.5	3.9	5.4	0.6	CuZn	22.2	9.4	-	24.2	5K	15K	ET-215HB	
1.0-2.5	3.9	5.4	0.6	CuZn gal Sn	22.2	9.4	-	24.2	5K	15K	ET-215HC	
1.0-2.5	3.9	5.4	0.6	St gal NI	22.2	9.4	-	24.2	5K	15K	ET-215HE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



FM 09860

5.0 - 2.4