




Eye Terminals without Insulation Support

Ringkabelschuhe Ohne Isolationshalterung

Connecteurs Ronds Sans Support Isolant



ET
2-3mm

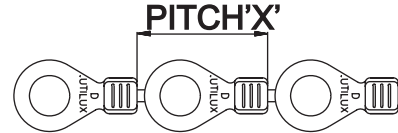

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgröße	Mat. dicke	Werkstoff				Spulengröße	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Epaisseur matériau	Matière				Bobines à	Cartons à	Code Nr	Homologations

Ribbed Palm

0.5-1.5	-	2.5	0.45	CuZn	9.8	6.5	11.0	20K	60K	ET-532EB	UL
0.5-1.5	-	2.5	0.45	CuZn gal Sn	9.8	6.5	11.0	20K	60K	ET-532EC	UL
0.5-1.5	-	2.5	0.45	CuNi Zn	9.8	6.5	11.0	20K	60K	ET-532ED	
0.5-1.5	-	3.7	0.45	CuZn	9.8	6.5	-	20K	60K	ET-533EB	UL
0.5-1.5	-	3.7	0.45	CuZn gal Sn	9.8	6.5	-	20K	60K	ET-533EC	UL
0.5-1.5	-	3.7	0.45	CuNi Zn	9.8	6.5	-	20K	60K	ET-533ED	

Plain Hole to Suit 3mm Stud

0.5-1.5	-	3.4	0.50	CuZn	13.1	7.5	14.7	10K	30K	ET-133EB	
0.5-1.5	-	3.4	0.50	CuZn gal Sn	13.1	7.5	14.7	10K	30K	ET-133EC	
0.5-1.3	-	3.7	0.45	CuZn	9.3	5.5	11.1	20K	60K	ET-133DB	
0.5-1.3	-	3.7	0.45	CuZn gal Sn	9.3	5.5	11.1	20K	60K	ET-133DC	
0.5-1.3	-	3.7	0.45	St gal Ni	9.3	5.5	11.1	20K	60K	ET-133DD	
0.5-1.3	-	3.4	0.45	CuZn	9.3	5.5	11.1	20K	60K	ET-133DB-2	
0.5-1.3	-	3.4	0.45	CuZn gal Sn	9.3	5.5	11.1	20K	60K	ET-133DC-2	
0.5-1.3	-	3.4	0.45	St gal Ni	9.3	5.5	11.1	20K	60K	ET-133DD-2	

0.4-1.0	-	3.5	0.425	CuZn	12.7	7.6	9.3	10K	30K	ET-133CB	UL
0.4-1.0	-	3.5	0.425	CuZn gal Sn	12.7	7.6	9.3	10K	30K	ET-133CC	UL
0.4-1.0	-	3.5	0.425	CuNi Zn	12.7	7.6	9.3	10K	30K	ET-133CD	
0.4-1.0	-	3.5	0.425	St gal Ni	12.7	7.6	9.3	10K	30K	ET-133CE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



5.0 - 1.5

FM 09860





Eye Terminals without Insulation Support

Ringkabelschuhe Ohne Isolationshalterung

Connecteurs Ronds Sans Support Isolant



ET
4-5mm

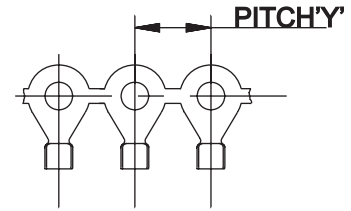

Wire Range	Max Insertion	Hole Size	Mat Thickness	Material	A	B	X	Y	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Lochgrösse	Mat. dicke	Werkstoff					Spulengrösse	Menge pro Karton	Best Nr	Zulassungen
Section câble	Gaine	Bornage	Épaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

Ribbed Palm

0.5-1.5	-	4.2	0.450	CuZn	9.8	6.5	11.0	-	20K	60K	ET-534EB	UL
0.5-1.5	-	4.2	0.450	CuZn gal Sn	9.8	6.5	11.0	-	20K	60K	ET-534EC	UL
0.5-1.5	-	4.2	0.450	CuNi Zn	9.8	6.5	11.0	-	20K	60K	ET-534ED	

0.4-1.0	-	4.3	0.425	CuZn	12.7	7.6	-	9.3	10K	30K	ET-134CB	UL
0.4-1.0	-	4.3	0.425	CuZn gal Sn	12.7	7.6	-	9.3	10K	30K	ET-134CC	UL
0.4-1.0	-	4.3	0.425	CuNi Zn	12.7	7.6	-	9.3	10K	30K	ET-134CD	
0.4-1.0	-	4.3	0.425	St gal Ni	12.7	7.6	-	9.3	10K	30K	ET-134CE	

Plain Hole to Suit 5mm Stud

0.4-1.0	-	5.1	0.425	CuZn	12.7	7.6	-	9.3	10K	30K	ET-135CB	UL
0.4-1.0	-	5.1	0.425	CuZn gal Sn	12.7	7.6	-	9.3	10K	30K	ET-135CC	UL
0.4-1.0	-	5.1	0.425	CuNi Zn	12.7	7.6	-	9.3	10K	30K	ET-135CD	UL

0.4-1.0	-	5.1	0.425	St gal Ni	12.7	7.6	-	9.3	10K	30K	ET-135CE	
---------	---	-----	-------	-----------	------	-----	---	-----	-----	-----	----------	--

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



FM 09860

5.0 - 1.6