





# Straight Receptacles

## Gerade Flachsteckhülsen

### Clip Droits



2.8  
x 0.5

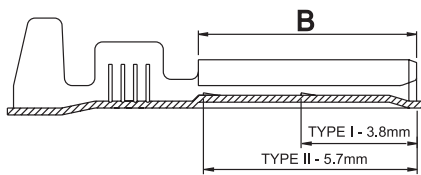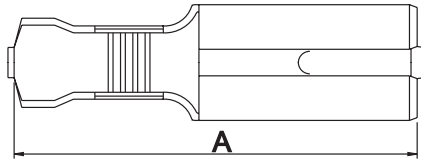

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau	A	B	C	X	Bobines à	Cartons à	Code Nr	Homologations

No Dimple - ohne Rastpunkt - sans point de verrouillage

0.2-0.75	2.9	0.5	0.25	CuZn	15.2	6.4	3.75	17.2	20K	60K	28SR05-11AB	UL
0.2-0.75	2.9	0.5	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	20K	60K	28SR05-11AC	UL
0.2-0.75	2.9	0.5	0.25	CuNi Zn	15.2	6.4	3.75	17.2	20K	60K	28SR05-11AD	UL
0.5-1.0	2.9	0.5	0.25	CuZn	15.2	6.4	3.75	17.2	15K	45K	28SR05-11RB	UL
0.5-1.0	2.9	0.5	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	15K	45K	28SR05-11RC	UL
0.5-1.0	2.9	0.5	0.25	CuNi Zn	15.2	6.4	3.75	17.2	15K	45K	28SR05-11RD	UL

Type I

0.2-0.75	2.9	0.5	0.25	CuZn	15.2	6.4	3.75	17.2	20K	60K	28SR05-10AB	UL
0.2-0.75	2.9	0.5	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	20K	60K	28SR05-10AC	UL
0.2-0.75	2.9	0.5	0.25	CuNi Zn	15.2	6.4	3.75	17.2	20K	60K	28SR05-10AD	UL

Type II

0.2-0.75	2.9	0.5	0.25	CuZn	15.2	6.4	3.75	17.2	20K	60K	28SR05-10AB-2	
0.2-0.75	2.9	0.5	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	20K	60K	28SR05-10AC-2	
0.2-0.75	2.9	0.5	0.25	CuNi Zn	15.2	6.4	3.75	17.2	20K	60K	28SR05-10AD-2	
0.5-1.5	3.5	0.5	0.25	CuZn	16.0	6.0	3.8	17.0	10K	30K	28SR05-10EB-5	
0.2-0.7	2.9	0.5	0.25	CuNi Zn	14.3	6.7	3.75	SF	6K	24K	28SR05-10AD-5	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



1.0 - 1.1

FM 09860





# Straight Receptacles

## Gerade Flachsteckhülsen

### Clip Droits



2.8  
x 0.8

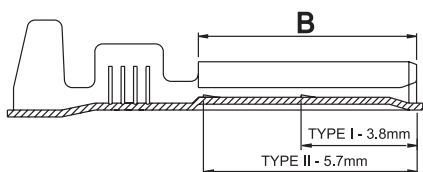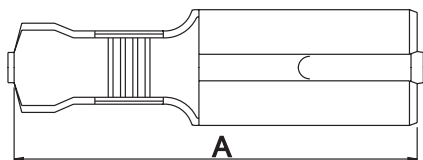

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau					Bobines à	Cartons à	Code Nr	Homologations

No Dimple - ohne Rastpunkt - sans point de verrouillage

0.2-0.75	2.9	0.8	0.25	CuZn	15.2	6.4	3.75	17.2	20K	60K	28SR08-11AB	UL
0.2-0.75	2.9	0.8	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	20K	60K	28SR08-11AC	UL
0.2-0.75	2.9	0.8	0.25	CuNi Zn	15.2	6.4	3.75	17.2	20K	60K	28SR08-11AD	UL
0.5-1.0	2.9	0.8	0.25	CuZn	15.2	6.4	3.75	17.2	15K	45K	28SR08-11RB	UL
0.5-1.0	2.9	0.8	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	15K	45K	28SR08-11RC	UL
0.5-1.0	2.9	0.8	0.25	CuNi Zn	15.2	6.4	3.75	17.2	15K	45K	28SR08-11RD	UL
0.5-1.0	2.9	0.8	0.25	St gal Ni	15.2	6.4	3.75	17.2	15K	45K	28SR08-11RE	UL
0.5-1.0	3.5	0.8	0.25	CuZn	16.0	6.0	3.8	17.0	10K	30K	28SR08-10EB-5	
0.2-1.0	2.9	0.8	0.25	CuNi Zn	14.3	6.7	3.8	SF	6K	24K	28SR08-10AD-5	

Type I

0.5-1.0	2.9	0.8	0.25	CuZn	15.2	6.4	3.75	17.2	15K	45K	28SR08-10RB	
0.5-1.0	2.9	0.8	0.25	CuZn gal Sn	15.2	6.4	3.75	17.2	15K	45K	28SR08-10RC	
0.5-1.0	2.9	0.8	0.25	CuNi Zn	15.2	6.4	3.75	17.2	15K	45K	28SR08-10RD	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



1.0 - 1.2





# Straight Receptacles

Gerade Flachsteckhülsen

Clip Droits



**2.8**  
x 0.5  
x 0.8

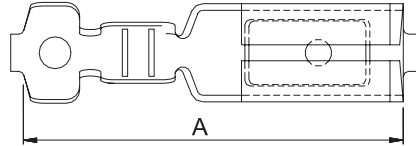

**DIMENSIONALLY CONFORMS TO DIN 46 247**

MATING FORCES			
1st Insertion	25N max	10th Withdrawal	9N

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff					Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

0.5-1.0	2.9	0.5	0.25	CuZn	14.3	6.1	3.2	16.0	20K	60K	28SR05-10DB	
0.5-1.0	2.9	0.5	0.25	CuZn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR05-10DC	
0.5-1.0	2.9	0.5	0.25	CuSn	14.3	6.1	3.2	16.0	20K	60K	28SR05-10DA	
0.5-1.0	2.9	0.5	0.25	CuSn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR05-10DG	
0.5-1.0	2.9	0.5	0.25	CuNi Zn	14.3	6.1	3.2	16.0	20K	60K	28SR05-10DD	
0.5-1.0	2.9	0.5	0.25	St gal Ni	14.3	6.1	3.2	16.0	20K	60K	28SR05-10DE	
0.5-1.0	2.9	0.8	0.25	CuZn	14.3	6.1	3.2	16.0	20K	60K	28SR08-10DB	
0.5-1.0	2.9	0.8	0.25	CuZn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR08-10DC	
0.5-1.0	2.9	0.8	0.25	CuSn	14.3	6.1	3.2	16.0	20K	60K	28SR08-10DA	
0.5-1.0	2.9	0.8	0.25	CuSn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR08-10DG	
0.5-1.0	2.9	0.8	0.25	CuNi Zn	14.3	6.1	3.2	16.0	20K	60K	28SR08-10DD	
0.5-1.0	2.9	0.8	0.25	St gal Ni	14.3	6.1	3.2	16.0	20K	60K	28SR08-10DE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



1.0 - 1.3

# Straight Receptacles, Locking




Gerade Flachsteckhülse Verriegelbar

Clip Droits, Avec Verrouillage



2.8

x 0.5  
x 0.8

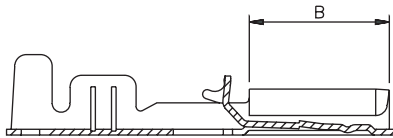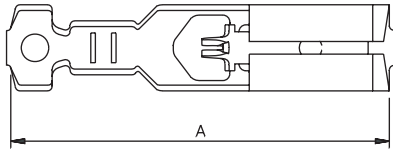

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

0.5-1.0	2.9	0.5	0.25	CuZn	16.4	6.1	3.2	18.0	15K	45K	28SL05-10DB	
0.5-1.0	2.9	0.5	0.25	CuZn gal Sn	16.4	6.1	3.2	18.0	15K	45K	28SL05-10DC	
0.5-1.0	2.9	0.5	0.25	CuSn	16.4	6.1	3.2	18.0	15K	45K	28SL05-10DA	
0.5-1.0	2.9	0.5	0.25	CuSn gal Sn	16.4	6.1	3.2	18.0	15K	45K	28SL05-10DG	
0.5-1.0	2.9	0.5	0.25	CuNi Zn	16.4	6.1	3.2	18.0	15K	45K	28SL05-10DD	
0.5-1.0	2.9	0.5	0.25	St gal Ni	16.4	6.1	3.2	18.0	15K	45K	28SL05-10DE	
0.5-1.0	2.9	0.8	0.25	CuZn	16.4	6.1	3.2	18.0	15K	45K	28SL08-10DB	
0.5-1.0	2.9	0.8	0.25	CuZn gal Sn	16.4	6.1	3.2	18.0	15K	45K	28SL08-10DC	
0.5-1.0	2.9	0.8	0.25	CuSn	16.4	6.1	3.2	18.0	15K	45K	28SL08-10DA	
0.5-1.0	2.9	0.8	0.25	CuSn gal Sn	16.4	6.1	3.2	18.0	15K	45K	28SL08-10DG	
0.5-1.0	2.9	0.8	0.25	CuNi Zn	16.4	6.1	3.2	18.0	15K	45K	28SL08-10DD	
0.5-1.0	2.9	0.8	0.25	St gal Ni	16.4	6.1	3.2	18.0	15K	45K	28SL08-10DE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



1.0 - 1.4

# Straight Receptacles, Low Insertion, For Housings





Gerade Flachsteckhülse  
Steckkraftreduziert Für Gehäusemontage

Clip Droits, Insertion Basse, Pour Boitier



2.8

x 0.5  
x 0.8

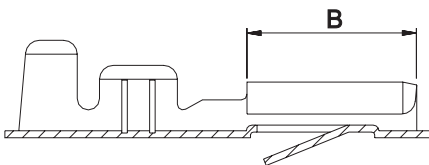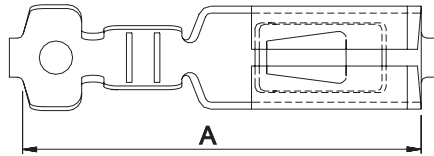

**DIMENSIONALLY CONFORMS  
TO DIN 46 340 PART 1**

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matière					Bobines à	Cartons à	Code Nr	Homologations

0.5-1.0	2.9	0.5	0.25	CuZn	14.3	6.1	3.2	16.0	20K	60K	28SR05-24DB	
0.5-1.0	2.9	0.5	0.25	CuZn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR05-24DC	
0.5-1.0	2.9	0.5	0.25	CuSn	14.3	6.1	3.2	16.0	20K	60K	28SR05-24DA	
0.5-1.0	2.9	0.5	0.25	CuSn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR05-24DG	
0.5-1.0	2.9	0.5	0.25	CuNi Zn	14.3	6.1	3.2	16.0	20K	60K	28SR05-24DD	
0.5-1.0	2.9	0.5	0.25	St gal Ni	14.3	6.1	3.2	16.0	20K	60K	28SR05-24DE	
0.5-1.0	2.9	0.8	0.25	CuZn	14.3	6.1	3.2	16.0	20K	60K	28SR08-24DB	
0.5-1.0	2.9	0.8	0.25	CuZn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR08-24DC	
0.5-1.0	2.9	0.8	0.25	CuSn	14.3	6.1	3.2	16.0	20K	60K	28SR08-24DA	
0.5-1.0	2.9	0.8	0.25	CuSn gal Sn	14.3	6.1	3.2	16.0	20K	60K	28SR08-24DG	
0.5-1.0	2.9	0.8	0.25	CuNi Zn	14.3	6.1	3.2	16.0	20K	60K	28SR08-24DD	
0.5-1.0	2.9	0.8	0.25	St gal Ni	14.3	6.1	3.2	16.0	20K	60K	28SR08-24DE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



1.0 - 1.5