


Straight Receptacles

Gerade Flachsteckhülse

Clips Droits



6.3
x 0.8

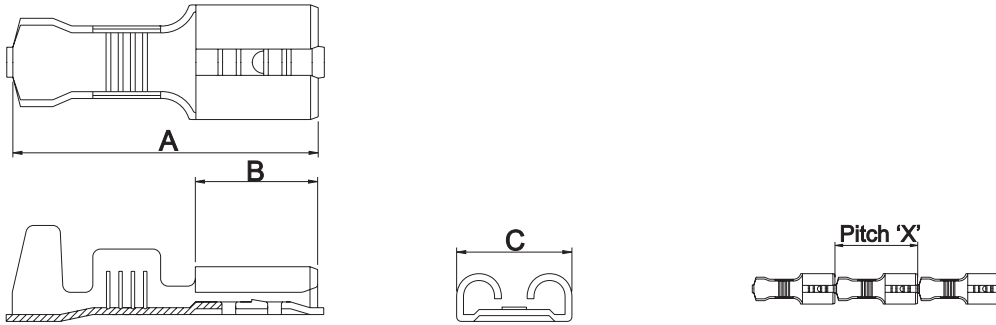

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau					Bobines à	Cartons à	Code Nr	Homologations

0.4-0.8	2.8	0.8	0.425	CuNi Zn	19.8	7.9	7.6	21.8	6K	18K	63SR08-10BD	UL
0.4-0.8	2.8	0.8	0.425	CuZn gal Sn	19.8	7.9	7.6	21.8	6K	18K	63SR08-10BC	UL
0.4-0.8	2.8	0.8	0.425	CuZn	19.8	7.9	7.6	21.8	6K	18K	63SR08-10BB	UL
0.4-0.8	2.8	0.8	0.425	St gal Ni	19.8	7.9	7.6	21.8	6K	18K	63SR08-10BE	
0.4-0.8	2.8	0.8	0.425	CuSn	19.8	7.9	7.6	21.8	6K	18K	63SR08-10BA	
0.5-1.5	3.2	0.8	0.425	CuZn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10EB	UL
0.5-1.5	3.2	0.8	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10EC	UL
0.5-1.5	3.2	0.8	0.425	CuSn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10EA	
0.5-1.5	3.2	0.8	0.425	CuNi Zn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10ED	UL
0.5-1.5	3.2	0.8	0.425	St gal Ni	19.8	7.9	7.5	21.8	6K	18K	63SR08-10EE	
0.7-2.1	3.3	0.8	0.425	CuZn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10GB	UL
0.7-2.1	3.3	0.8	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10GC	UL
0.7-2.1	3.3	0.8	0.425	CuNi Zn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10GD	UL
0.7-2.1	3.3	0.8	0.425	St gal Ni	19.8	7.9	7.5	21.8	6K	18K	63SR08-10GE	
0.7-2.1	3.3	0.8	0.425	CuSn	19.8	7.9	7.5	21.8	6K	18K	63SR08-10GA	UL
3.0-6.0	5.1	0.8	0.400	CuZn gal Sn	19.8	7.9	7.5	21.4	5K	15K	63SR08-10JC	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



3.0 - 1.1



Straight Receptacles

Gerade Flachsteckhülse



Clips Droits



6.3
x 0.8



TANG DETAIL



Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau	A	B	C	X	Bobines à	Cartons à	Code Nr	Homologations

2-Wire

0.7-1.5x2	3.3x2	0.8	0.425	CuZn	19.8	7.9	7.5	21.8	5K	15K	63SR08-12FB	
0.7-1.5x2	3.3x2	0.8	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	5K	15K	63SR08-12FC	
0.7-1.5x2	3.3x2	0.8	0.425	CuNi Zn	19.8	7.9	7.5	21.8	5K	15K	63SR08-12FD	
0.7-1.5x2	3.3x2	0.8	0.425	St gal Ni	19.8	7.9	7.5	21.8	5K	15K	63SR08-12FE	
0.7-1.5x2	3.3x2	0.8	0.425	CuSn	19.8	7.9	7.5	21.8	5K	15K	63SR08-12FA	

With tang

0.7-2.1	3.9	0.8	0.425	CuZn	19.8	7.9	7.5	21.8	8K	24K	63SR08-14GB	
0.7-2.1	3.9	0.8	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	8K	24K	63SR08-14GC	
0.75-2.0	3.9	0.8	0.425	CuZn	19.3	7.4	7.5	21.4	5K	15K	63SR08-14GB-02	

With tang but no dimple DIN 46 340 Teil. 3

0.5 - 1.0	-	0.8	0.45	CuZn	20.0	7.4	7.5		6K	18K	63SR08-14DB	
0.5 - 1.0	-	0.8	0.45	CuZn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-14DC	
0.5 - 1.0	-	0.8	0.45	CuSn	20.0	7.4	7.5		6K	18K	63SR08-14DA	
0.5 - 1.0	-	0.8	0.45	CuSn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-14DG	
0.5 - 1.0	-	0.8	0.45	CuZn	20.0	7.4	7.5		6K	18K	63SR08-17DB	
0.5 - 1.0	-	0.8	0.45	CuZn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-17DC	
0.5 - 1.0	-	0.8	0.45	CuSn	20.0	7.4	7.5		6K	18K	63SR08-17DA	
0.5 - 1.0	-	0.8	0.45	CuSn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-17DG	
0.5 - 1.0	-	0.8	0.45	CuZn	20.0	7.4	7.5		6K	18K	63SR08-14HB	
0.5 - 1.0	-	0.8	0.45	CuZn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-14HC	
0.5 - 1.0	-	0.8	0.45	CuSn	20.0	7.4	7.5		6K	18K	63SR08-14HA	
0.5 - 1.0	-	0.8	0.45	CuSn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-14HG	
0.5 - 1.0	-	0.8	0.45	CuZn	20.0	7.4	7.5		6K	18K	63SR08-17HB	
0.5 - 1.0	-	0.8	0.45	CuZn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-17HC	
0.5 - 1.0	-	0.8	0.45	CuSn	20.0	7.4	7.5		6K	18K	63SR08-17HA	
0.5 - 1.0	-	0.8	0.45	CuSn gal Sn	20.0	7.4	7.5		6K	18K	63SR08-17HG	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



3.0 - 1.2




Straight Receptacles, Low Insertion

Gerade Flachsteckhülse
Steckkraftreduziert

Clips Droits, Insertion Basse



6.3
x 0.8
x 1.0



Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau	A	B	C	X	Bobines à	Cartons à	Code Nr	Homologations

0.4-0.8	2.8	0.8	0.425	CuZn	19.8	7.9	7.6	21.8	6K	18K	63SR08-20BB	
0.4-0.8	2.8	0.8	0.425	CuZn gal Sn	19.8	7.9	7.6	21.8	6K	18K	63SR08-20BC	
0.4-0.8	2.8	0.8	0.425	CuNi Zn	19.8	7.9	7.6	21.8	6K	18K	63SR08-20BD	
0.4-0.8	2.8	0.8	0.425	St gal Ni	19.8	7.9	7.6	21.8	6K	18K	63SR08-20BE	
0.4-0.8	2.8	0.8	0.425	CuSn	19.8	7.9	7.6	21.8	6K	18K	63SR08-20BA	
0.7-1.5	3.2	0.8	0.425	CuZn	19.8	7.9	7.5	21.8	6K	18K	63SR08-20FB	
0.7-1.5	3.2	0.8	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR08-20FC	
0.7-1.5	3.2	0.8	0.425	CuNi Zn	19.8	7.9	7.5	21.8	6K	18K	63SR08-20FD	
0.7-1.5	3.2	0.8	0.425	St gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR08-20FE	
0.7-1.5	3.2	0.8	0.425	CuSn	19.8	7.9	7.5	21.8	6K	18K	63SR08-20FA	

2-Wire

2x0.7-1.5	3.3x2	0.8	0.425	CuZn	19.8	7.9	7.5	21.8	5K	15K	63SR08-22FB	
2x0.7-1.5	3.3x2	0.8	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	5K	15K	63SR08-22FC	
2x0.7-1.5	3.3x2	0.8	0.425	CuNi Zn	19.8	7.9	7.5	21.8	5K	15K	63SR08-22FD	
2x0.7-1.5	3.3x2	0.8	0.425	St gal Ni	19.8	7.9	7.5	21.8	5K	15K	63SR08-22FE	
2x0.7-1.5	3.3x2	0.8	0.425	CuSn	19.8	7.9	7.5	21.8	5K	15K	63SR08-22FA	

0.5-1.5	3.2	1.0	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR08-20EC	
0.5-1.5	3.2	1.0	0.425	CuSn gal Sn	19.8	7.9	7.5	21.8	6k	18k	63SR10-20EG	
2x0.5-1.5	3.2	1.0	0.425	CuZn gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR10-22EC	
2x0.5-1.5	3.2	1.0	0.425	CuSn gal Sn	19.8	7.9	7.5	21.8	6K	18K	63SR10-22EG	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



3.0 - 1.3


Straight Receptacles

Gerade Flachsteckhülse




Clips Droits



6.3
x 0.8

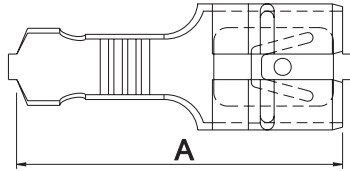

DIMENSIONALLY
CONFORMS TO
DIN 46 247 PART 3



MATING FORCES

1st Insertion	50N max	10th Withdrawal	22N min
---------------	---------	-----------------	---------

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen grösse	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau					Bobines à	Cartons à	Code Nr	Homologations

0.5-1.0	2.9	0.8	0.425	CuZn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10DB	
0.5-1.0	2.9	0.8	0.425	CuZn gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10DC	
0.5-1.0	2.9	0.8	0.425	CuSn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10DA	
0.5-1.0	2.9	0.8	0.425	CuSn gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10DG	
0.5-1.0	2.9	0.8	0.425	CuNi Zn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10DD	
0.5-1.0	2.9	0.8	0.425	St gal Ni	19.1	7.8	7.8	21.3	6K	18K	63SR08-10DE	
1.0-2.5	3.3	0.8	0.425	CuZn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10HB	
1.0-2.5	3.3	0.8	0.425	CuZn gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10HC	
1.0-2.5	3.3	0.8	0.425	CuSn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10HA	
1.0-2.5	3.3	0.8	0.425	CuSn gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10HG	
1.0-2.5	3.3	0.8	0.425	CuNi Zn	19.1	7.8	7.8	21.3	6K	18K	63SR08-10HD	
1.0-2.5	3.3	0.8	0.425	St gal Ni	19.1	7.8	7.8	21.3	6K	18K	63SR08-10HE	
0.5 - 1.0	-	0.8	0.45	CuZn	19.2	7.4	7.5		6K	18K	63SR08-10DB-HS	
0.5 - 1.0	-	0.8	0.45	CuZn gal Sn	19.2	7.4	7.5		6K	18K	63SR08-10DC-HS	
0.5 - 1.0	-	0.8	0.45	CuSn	19.2	7.4	7.5		6K	18K	63SR08-10DA-HS	
0.5 - 1.0	-	0.8	0.45	CuSn gal Sn	19.2	7.4	7.5		6K	18K	63SR08-10DG-HS	
0.5 - 1.0	-	0.8	0.45	CuZn	19.2	7.4	7.5		6K	18K	63SR08-10HB-HS	
0.5 - 1.0	-	0.8	0.45	CuZn gal Sn	19.2	7.4	7.5		6K	18K	63SR08-10HC-HS	
0.5 - 1.0	-	0.8	0.45	CuSn	19.2	7.4	7.5		6K	18K	63SR08-10HA-HS	
0.5 - 1.0	-	0.8	0.45	CuSn gal Sn	19.2	7.4	7.5		6K	18K	63SR08-10HG-HS	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



3.0 - 1.4


Straight Receptacles, Low Insertion

Gerade Flachsteckhülse
Steckkraftreduziert



Clips Droits, Insertion Basse



6.3
x 0.8

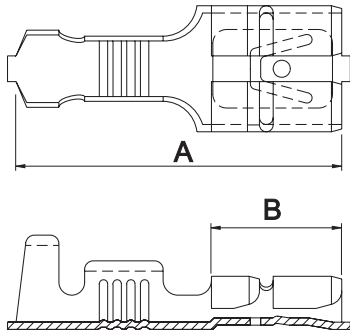

DIMENSIONALLY
CONFORMS TO DIN
46 247 PART 3



MATING FORCES

1st Insertion	35N max	10th Withdrawal	22N
---------------	---------	-----------------	-----

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau					Bobines à	Cartons à	Code Nr	Homologations

0.5-1.0	2.8	0.8	0.425	CuZn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20DB	
0.5-1.0	2.8	0.8	0.425	CuZn gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20DC	
0.5-1.0	2.8	0.8	0.425	CuNi Zn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20DD	
0.5-1.0	2.8	0.8	0.425	St gal Ni	19.1	7.8	7.8	21.3	6K	18K	63SR08-20DE	
0.5-1.0	2.8	0.8	0.425	CuSn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20DA	
1.0-2.5	3.9	0.8	0.425	CuZn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20HB	
1.0-2.5	3.9	0.8	0.425	CuZn gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20HC	
1.0-2.5	3.9	0.8	0.425	CuNi Zn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20HD	
1.0-2.5	3.9	0.8	0.425	St gal Sn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20HE	
1.0-2.5	3.9	0.8	0.425	CuSn	19.1	7.8	7.8	21.3	6K	18K	63SR08-20HA	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



3.0 - 1.5

FM 09860




Straight Receptacle Locking

Gerade Flachsteckhülse Verriegelbar

Clips Droits Avec Verrouillage



6.3
x 0.8

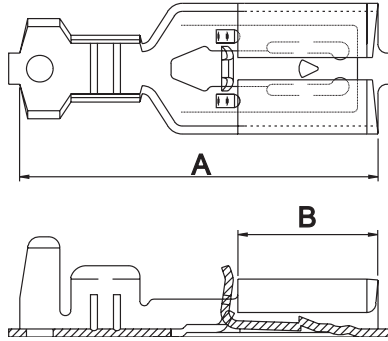

DIMENSIONALLY CONFORMS TO DIN 46 247 PART 3

Wire Range	Max.Ins	Tab Thickness	Mat Thickness	Material	A	B	C	X	Reel Size	Carton Size	Part Number	Approvals
Nennquerschnitt	Stift	Steckerdicke	Mat.dicke	Werkstoff	A	B	C	X	Spulen größe	Menge pro karton	Best Nr	Zulassungen
Section câble	Gaine	Epaisseur languette	Epaisseur matériau	Matériau					Bobines à	Cartons à	Code Nr	Homologations

0.5-1.0	2.9	0.8	0.425	CuZn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10DB	
0.5-1.0	2.9	0.8	0.425	CuZn gal Sn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10DC	
0.5-1.0	2.9	0.8	0.425	CuSn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10DA	
0.5-1.0	2.9	0.8	0.425	CuSn gal Sn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10DG	
0.5-1.0	2.9	0.8	0.425	CuNi Zn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10DD	
0.5-1.0	2.9	0.8	0.425	St gal Ni	19.6	7.5	6.6	22.0	6K	18K	63SL08-10DE	
1.0-2.5	3.3	0.8	0.425	CuZn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10HB	
1.0-2.5	3.3	0.8	0.425	CuZn gal Sn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10HC	
1.0-2.5	3.3	0.8	0.425	CuSn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10HA	
1.0-2.5	3.3	0.8	0.425	CuSn gal Sn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10HG	
1.0-2.5	3.3	0.8	0.425	CuNi Zn	19.6	7.5	6.6	22.0	6K	18K	63SL08-10HD	
1.0-2.5	3.3	0.8	0.425	St gal Ni	19.6	7.5	6.6	22.0	6K	18K	63SL08-10HE	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



3.0 - 1.6