


6.3 Connector System

6.3 Verbinder Systeme

6.3 Système de Connexion



CONN

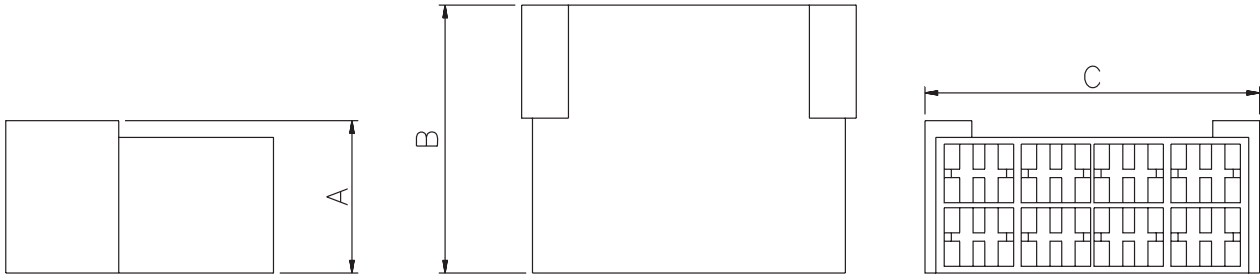

Ways	Description	Material	A	B	C	D	Pack Size	Part Number	Approvals
Wegen Nr	Beschreibung	Werkstoff	A	B	C	D	Packung	Best Nr	Zulassungen
No. Voies	Description	Matiere					Confection	Code. Nr.	Homologations

Use Tab Terminal 63CT08-10D Or 10G / Use Female Terminal 63SR08-14G

1	Male	PA 66 V2	6.5	23	10	-	30K	CS-A-01-01	
2	Male	PA 66 V2	10	23	12.8	-	13K	CS-A-02-01	
2	Male	PA 66 V2	10	23	12.8	-	13K	CS-A-02-01-02	
3	Male	PA 66 V2	16.8	23	12.8	-	10K	CS-A-03-01	
4	Male	PA 66 V2	13.5	24	23	-	6K	CS-A-04-01	
6	Male	PA 66 V2	13.7	24.3	28.5	-	5K	CS-A-06-01	
6	Male	PA 66 V2	13.7	24.3	28.5	-	4K	CS-A-06-01-02	
8	Male	PA 66 V2	13.9	24.3	37.7	-	3.5K	CS-A-08-01	
1	Female	PA 66 V2	9.4	32	12.5	-	15K	CS-B-01-01	
2	Female	PA 66 V2	13.2	32	15.2	-	9K	CS-B-02-01	
2	Female	PA 66 V2	13.2	32	15.2	-	9K	CS-B-02-01-02	
3	Female	PA 66 V2	20	32	15.2	-	6K	CS-B-03-01	
4	Female	PA 66 V2	16.5	32	26.2	-	4K	CS-B-04-01	
6	Female	PA 66 V2	16.2	32	31.3	-	3K	CS-B-06-01	
6	Female	PA 66 V2	16.2	32	31.3	-	2.5K	CS-B-06-01-02	
8	Female	PA 66 V2	16.2	32	40.5	-	2K	CS-B-08-01	
8	Female	PA 66 V2	16.2	32	40	-	2.5K	CS-B-08-01-02	
6	Female	No Frame	16.2	32	31.3	-	3K	CS-B-06-03	

Germany +49 (0) 202 460 3468

Europe +421 43 583 1311

United Kingdom +44 (0) 1986 891516



making the connection



FM 09860

7.0 - 1.3